



WARNING

**DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE.
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**



CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the Gray/ BLACK wire will be the "Hot" lead and the Blue wire will be the "Neutral" or "Common" lead. A GREEN & YELLOW wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring for this lighting fixture.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.
- For your safety be certain that all circuit breakers controlling outdoor lighting and other equipment are GFI Breakers

FIXTURE PREPARATION

1. Remove the fixture, parts and parts bag(s) from the carton.

NOTICE:

Before discarding the carton, double check to make certain that all parts are found.

FIXTURE INSTALLATION

1. Fasten the bare copper fixture wire to the green or bare copper wire in the post.



WARNING


Never fasten the ground wire to the black or "hot" wire!
Failure to follow this instruction could result in serious injury or death!

2. Fasten the white fixture wire to the white wire in the post. Fasten the wires to together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap connection with electrical tape so that the tape seals the end of the fastener
Fixture cage



WARNING

Make sure that there is no exposed wire or strands that could cause a dangerous short circuit.

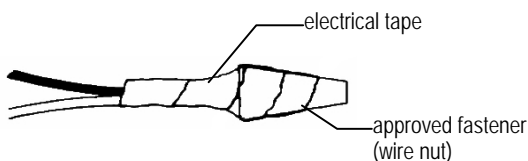

3. Connect the black fixture wire to the black wire in the post.
Fasten the joined wires as in step 2.
 4. Place the fixture on the post and fasten it in place with the 3 set screws
 5. Remove the 4 end balls from the top corners of the fixture.
Remove the roof of the fixture.
 6. Put the sponge strip into bottom of fixture cage. Use the sponge strip prevent the glass edge.
Then fasten the pan glass into fixture cage.
 7. Install the lamps (light bulbs).
- NOTE: This fixture is rated for 60 watt type B, BA, C or CA lamps


WARNING
 DO NOT EXCEED RECOMMENDED WATTAGE!

8. Reinstall the roof. Reinstall the end balls.
9. Restore power to circuit at breaker or fuse box.

